



UNIQUE

Packaging Systems

Manufacturers & Exporters of Automatic
& Semi-Automatic Pouch Packing Machines.



THE UNIQUE WAY TO PACK



MODEL UA-020 **AUTOMATIC LIQUID-FILL & SEAL MACHINE**

APPLICATIONS:-

Highly Suitable for :- Liquids, Paste, Tomato Ketchup, Wine, Shampoo, Jam, Soya milk and Mineral Water etc.

TECHNICAL SPECIFICATIONS

| | |
|--------------------|---|
| SEALING TYPE | 3 Side Seal / 4 Side Seal / Centre Seal |
| PACKAGING SIZE | (Length) 40 - 200 mm. (Film Width) 60 - 350 mm. |
| PACKING SPEED | 40 - 90 Pouches / Per Minutes. (Depending upon the Size) |
| PACKAGING RANGE | 05-20, 20-50, 50-100, 100-250 ml. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| MOTOR | 1/2HP, 220V AC, Single Phase. |
| HEATER LOAD | 2 Kw. Maximum. |
| MACHINE DIMENSIONS | L 750 x W 550 x H 1800 (mm) |
| WEIGHT OF MACHINE | 400 Kgs. Approx. |

MODEL UA-040

AUTOMATIC FORM-FILL & SEAL MACHINE

APPLICATIONS:-

Highly Suitable for :- Turmeric Powder, Spices, Chillies Powder, Mehandi Powder, Glucose Powder, Ors Powder, Baby Foods, Kurkure, Namken etc.

TECHNICAL SPECIFICATIONS

| | |
|-------------------|--|
| SEALING TYPE | 3 Side Seal / 4 Side Seal / Centre Seal |
| PACKAGING SIZE | (Length) 40 to 300 mm. (Film Width) 60 to 400 mm. |
| PACKING SPEED | 15 to 60 Pouches / Minutes. (Depending upon the Size) |
| PACKAGING RANGE | 5 - 20, 20 - 50, 50 -100, 100 - 250, 250 - 500 gms. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| MOTOR | 1/2HP, 220V AC, 50Hz., Single Phase. |
| POWER CONSUMPTION | 2 Kw Single Phase. |
| DIMENSIONS / Wt. | L :800, W :610, H :1940 (mm) / 400 Kgs. |





MODEL UA-051A **AUTOMATIC FFS MACHINE PNEUMATIC TYPE** **WITH AUGER FILLER**

APPLICATIONS:-

Highly Suitable for :- Spices Powder, Mehandi Powder, Glucose Powder, Ors Powder etc.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|--|
| SEALING TYPE | 3 Side Seal / 4 Side Seal / Centre Seal |
| PACKING SPEED | 15 to 60 Pouches / Minutes. (Depending upon the Size) |
| PACKAGING RANGE | 10 to 500 gms. Powder In single Machine. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| POWER CONSUMPTION | 3 Kw three phase / single phase. |
| COMPRESSED AIR Req. | 6 CFM @ 6kg/cm ² |
| DIMENSIONS / Wt. | L-1000, W-1000, H-2300 (mm) / 600 Kgs. |

MODEL UA-051B

AUTOMATIC FFS MACHINE PNEUMATIC TYPE **WITH CUP FILLER**

APPLICATIONS:-

Highly Suitable for :- Kurkure, Namkeen, Snacks, Tea, Powder Pulses, Rice, Poha, Detergent Powder, Spices etc.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|--|
| SEALING TYPE | 3 Side Seal / 4 Side Seal / Centre Seal |
| PACKING SPEED | 15 to 60 Pouches / Minutes. (Depending upon the Size) |
| PACKAGING RANGE | 10 - 50gm, 50 - 500gm, 100gm-1kg. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| POWER CONSUMPTION | 3 Kw three phase / single phase. |
| COMPRESSED AIR Req. | 6 CFM @ 6kg/cm ² |
| DIMENSIONS / Wt. | L-1000, W-1000, H-2300 (mm) / 600 Kgs. |





MODEL UA-090 **AUTOMATIC COLLAR TYPE WEIGH FILLER MACHINE** **(DOUBLE HEAD/FOUR HEAD)**

APPLICATIONS:-

Highly Suitable for :- Kurkure & Potato Chips, Chivda, Namkeen, Dry-Fruits, Pulses, Grains, Tea, Sugar, Seeds, Soya etc.

TECHNICAL SPECIFICATIONS

| | |
|--------------------------|--|
| TYPE OF FILLER | Weigh Filler |
| CONTROL | PLC Controlled |
| Mode of Operation | Pneumatic and Motorised |
| FILLING SPEED | 15 to 40 pouches/min. (Depending upon the Size) |
| FILLING CAPACITY (RANGE) | 5 gms. to 10 Kgs. |
| PACKAGING MATERIAL | Any heat sealable Laminated Films. |
| POWER REQUIREMENT | 220V Single Phase OR 420V Three Phase |
| COMPRESSED AIR Req. | 6-8 CFM @ 6kg/cm ² |
| VARIETY OF MODELS | 5g. - 1kg., 1kg. - 10 kgs. |
| DIMENSIONS | L-1200, W-1000, H-3350 (mm) |

MODEL UA-051W

AUTOMATIC FFS MACHINE PNEUMATIC TYPE WITH **WEIGH FILLER (DOUBLE HEAD/FOUR HEAD)**

APPLICATIONS:-

Highly Suitable for :- Kurkure, Namkeen, Snacks, Tea, Pulses, Rice, Poha, Detergent Powder, Spices etc.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|--|
| TYPE OF FILLER | Weigh Filler |
| CONTROL | PLC Controlled |
| MODE OF OPERATION | Pneumatic and Motorised |
| SEALING TYPE | 3 Side Seal / 4 Side Seal / Centre Seal |
| PACKING SPEED | 15 to 40 Pouches / Minutes. (Depending upon the Size) |
| PACKAGING RANGE | 05gms. - 1kg. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| POWER CONSUMPTION | 4.5 Kw three phase / single phase. |
| COMPRESSED AIR Req. | 6 CFM @ 6kg/cm ² |
| DIMENSIONS / Wt. | L :1000, W :1000, H :3000 (mm) / 600 Kgs. |





**Servo
PLC
BASED**
HIGH SPEED

MODEL UA-050A
AUTOMATIC COLLAR TYPE PACKING MACHINE
WITH SERVO AUGER FILLING SYSTEM

APPLICATIONS:-

Highly Suitable for :- Spices Powder, Mehendi Powder, Besan, Maida Pesticides Powder, and other similar Products.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|--|
| SEALING TYPE | Centre Seal with constant heat. |
| CENTER FIN SEAL | 10mm. to 12mm. |
| PACKAGING SIZE | (Length) 100 to 300 mm. (Film Width) 220 to 500 mm. |
| PACKING SPEED | 15 to 90 Pouches / Minutes Approx. |
| PACKAGING RANGE | 10gms. to 1Kg, 1Kg to 2Kg, 5Kg to 10Kg. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| TYPES OF FILLER | Auger Filler. |
| POWER Consumption | 4 KVA, AC, Three Phase / Single Phase |
| COMPRESSED AIR Req. | 6-8 CFM @ 6kg/cm ² |
| DIMENSIONS / Wt. | L 2100 x W 1200 x H 2750 (mm) / 600 Kgs. |

MODEL UA-050B

AUTOMATIC COLLAR TYPE PACKING MACHINE
WITH CUP FILLER SYSTEM

APPLICATIONS:-

Highly Suitable for :- Rice, Pulses, Bio-fertilizer, Namkeen, Tea, Detergent Powder, Salt, Sugar, Puff and other similar Products.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|---|
| SEALING TYPE | Centre Seal with constant heat. |
| CENTRAL FIN SEAL | 10mm. to 12mm. |
| PACKAGING SIZE | (Length) 100 to 300 mm. (Film Width) 220 to 500 mm. |
| PACKING SPEED | 15 to 50 Pouches / Minutes Approx. |
| PACKAGING RANGE | 5-20, 20-50, 50-500 gm. 100gm-1kg, 500gm-2kg, 2-5kg, 5-10kg. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| TYPES OF FILLER | Adjustable Volumetric Cup Filler. |
| POWER Consumption | 4 KVA, AC, Single Phase /Three Phase. |
| COMPRESSED AIR Req. | 6-8 CFM @ 6kg/cm ² |
| DIMENSIONS / Wt. | L 2100 x W 1200 x H 3000 (mm) / 500Kgs. |



**PLC
BASED**



MODEL UA-091 MULTI HEAD COMBINATION WEIGHER (10 HEAD/14 HEAD)

High Speed & High Precision weighing is the uniqueness of multihead weigh filler. UNIQUE series is well known for its pouch finish & sealing intactness which prevents leakage of inert gas from pouches & gives extended product shelf life.

APPLICATIONS:-

Highly Suitable for :- Kurkure & Potato Chips, Farsan,Chiwda, Namkeen, Dry - Fruits, Pulses, Grains, Tea, Sugar, Seeds, Frozen cut vegetable etc.

TECHNICAL SPECIFICATIONS

| | |
|--------------------------|--|
| CONTROL | PLC Controlled. |
| MODE OF OPERATION | Pneumatic. |
| FILLING SPEED | 1000 to 4000 pouches/hr (Depending upon the Size) |
| FILLING CAPACITY (RANGE) | 10 gms.-1kg., 100gms.-5kg. |
| PACKAGING MATERIAL | Any heat sealable Laminated Films. |
| POWER REQUIREMENT | 420V. AC Three Phase, 50Hz. |
| COMPRESSED AIR Req. | 6-8 CFM @ 6kg/cm ² |
| REEL CORE DIAMETER | 70mm to 76mm. Max. Weight 50 kg. |
| DIMENSIONS / Wt. Approx. | L-4500, W-2400, H-3350 (mm) /1400 Kgs. |



MODEL UA-202

ROTARY TYPE GRANULE PREMADE BAG PACKING MACHINE

Flow Chart

Pouch Feeding → Data Printing → Pouch Opening → Producing Feeding & Vibrating → Vibration → Heat Sealing → Finished Package Output.

Summary

Fully automatic rotary packing machine and electronic weigher with accurate measurement, fast packaging speed, stable operation and wide application range and other advantages for the food industry.

Application

Suitable for candy, hard nut, raisin seeds, chocolate, biscuit, pet food and other solids automatic weighing packages.

Pouch Style

Stand bag, Hand bag, Zipper bag, Four side bag, Three side seal bag, Paper bag, M Gusset bag or other Laminated bags.

TECHNICAL SPECIFICATIONS

| | |
|---------------------|-----------------------------------|
| STATION NUMBER | 8 Nos. |
| BAG SIZE | Length 100-300mm. Width 80-200mm. |
| SPEED | 25-60 Bags / min. |
| FILLING RANGE | 10gms.-1kg., 100gms.-5kg. |
| PRECISION | < ± 1% g. |
| COMPRESSED AIR Req. | 8 CFM @ 6kg/cm ² |
| POWER | 6.5 Kw. |
| POWER SUPPLY | 350V/50Hz.-60Hz. |
| WEIGHT | 2500 Kg. |
| DIMENSION | L-5700 x W-2000 x H-3500mm. |
| BAG SIZE ADJUST | Manually / Automatically |





MODEL UA-070

AUTOMATIC HORIZONTAL FLOW WRAP MACHINE

APPLICATIONS:-

Highly Suitable for :- Packing of Biscuits, Chocolates, Soaps, Stationary Items, Ball Bearings, Auto Parts, Toys and other solid products.

TECHNICAL SPECIFICATIONS

| | |
|--------------------|--|
| SEALING TYPE | Pillow type continuous. |
| WRAPPING SIZE | LENGTH : 100 to 350 mm, WIDTH : 90 to 450 mm, HEIGHT : 10 to 100 mm. |
| PACKING SPEED | 40 to 200 Packets /Minutes. (Depending upon the size) |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| MOTOR | 1HP, 220V AC, 50Hz., Single Phase. |
| POWER CONSUMPTION | 2.5 kw, with AC, Drive Single Phase. |
| MACHINE DIMENSIONS | L 3600 x W 1500 x H 1800 (mm) |
| WEIGHT OF MACHINE | 450 Kgs (Approx.) |

MODEL UA-071

AUTOMATIC RUSK PACKING MACHINE

We are the pre-dominant Rusk packing machine manufacturer and exporter who completely satisfies the customer's demands. We offer rusk packing machine that is highly acclaimed for the unbeatable features it possesses. The machine is available for packing rusk in 1,2 and 3 lines.



TECHNICAL SPECIFICATIONS

| | |
|--------------------|---|
| FEEDING STYLE | Auto Feeder. |
| SEALING STYLE | Pillow Type continuous. |
| PACKING MATERIAL | Any heat sealable Laminated Films. |
| PACKAGING SPEED | 20 - 35 Packets /Minutes. |
| POWER CONSUMPTION | 2.5 kw, with AC Drive, Single Phase. |
| MAXIMUM FILM | LENGTH : 150 to 350 mm, WIDTH : 180 to 550 mm, HEIGHT : 50 to 120 mm. |
| MOTOR | 1 HP, 220V AC, 50Hz., Single Phase. |
| MACHINE DIMENSIONS | L -3750, W -1500, H -1800 mm. |
| WEIGHT OF MACHINE | 950 Kgs. (Approx.) |



MODEL UA-303

AUTOMATIC L SEALER WITH SHRINK TUNNEL

Shrink tunnels use a heated air system. It's used for shrinkable films like PE, POF, PVC that have been applied by L-bar sealers, sleeve wrappers, and sealing cutters. Designed for high production, the air flow technology is used to circulate the air to avoid bubbles and bumps in plastic film. Independent control systems regulate temperature, air velocity and conveyor speeds. Our shrink tunnels feature carefully controlled air velocity and temperature that are maintained throughout the tunnel for optimum film shrink. The efficient heating system on each machine reduces the amount of electricity needed to run the machine, consequently reducing operating costs. It is used to shrink pack goods, such as cans, glass bottles, mineral water etc, in wood, rolled steel, ceramics, household appliances, computers industries and more.



AUTOMATIC L SEALER

SHRINK TUNNEL

Automatic L-seal cutting machine is fully automatic unmanned L sealing cutter, widely used for lot production with high efficiency. The machine is equipped with auto film feeding & perforating device and adjustable product infeed conveying table in order to meet different requirements from different products.

APPLICATIONS:-

Automatic L-seal cutting machine is suitable for lot shrink wrapping in various industries, such as software, foodstuff, cosmetics, printing, pharmacy, flooring, ceramics, beverage and hardware etc.

MODEL UA-303A

WEB SEALER MACHINE

Web Sealer Machine can be pushed manually or pneumatically. After the process of sealing & cutting, the products enter the shrink tunnel automatically.

APPLICATIONS:-

Shrink packing for many industries, such as printing, pharmacy, floor, chinaware, beverage, beer etc.

It's suitable for all kinds of shrink films such as PVC, POF, PP, PE etc

TECHNICAL SPECIFICATIONS

| MODEL | Web Sealer | Shrink Tunnel |
|-------------------------------|-----------------------|------------------------|
| VOLTAGE (V/Hz) | 300v/50hz 3 phase | 380v/50hz 3 phase |
| POWER CONSUMPTION (KW) | 1.5 | 21 |
| PACKING SPEED (pcs/min) | 0~12 | 0~10 |
| MAX PACKING Dimension (mm) | L-500 x W-290 x H-380 | L-1450 x W-550 x H-400 |
| MAX SEALING LENGTH (mm) | 650 | - |
| HEIGHT OF CONVEYOR (mm) | 800+50 (Adjustable) | - |
| WORKING AIR Pressure (Kgf/m2) | 6 | - |
| DIMENSION (L x W x H) (mm) | 1370 x 920 x 1800 | 2550 x 850 x 1500 |
| CONVEYOR LOADING (Kgs.) | - | 40 |
| HEATING TIME (Minutes) | - | 10 |
| COOLING TIME (Minutes) | - | 15 |
| WEIGHT (Kgs.) | 300 | 300 |





MODEL UA-030 A **SEMI AUTOMATIC AUGER FILLER MACHINE**

APPLICATIONS:-

Highly Suitable for :- Wheat flour, Turmeric Powder, Chilli Powder, Pesticides Powder, Mehandi Powder, Glucose Powder or any type of fine Powder etc.

TECHNICAL SPECIFICATIONS

| | |
|--------------------|--|
| OPERATION | Mechanical / Pneumatic. |
| CONTROL | Electronically or PLC controlled. |
| OUTPUT | 15-60 Fills/min & 5-8 Fills/min with weighing (Subject to model & gramage) |
| PACKAGING RANGE | 1gm to 1Kg., 1Kg to 10 Kg. |
| PACKAGING MATERIAL | Any ready pouches, jar, containers etc. |
| POWER REQUIREMENT | 420V AC 3Phase, 50 Hz (Subject models) |

Screw conveyor as per specific requirements.

MODEL UA-060

SEMI AUTOMATIC CUP FILLER MACHINE

APPLICATIONS:-

Highly Suitable for :- Various Powders, Granules, Tea, Coffee, Dhana Dal, Tablets, Dhana Dal, Namkeen, Etc.

TECHNICAL SPECIFICATIONS

| | |
|------------------|---|
| PACKING SPEED | 5 to 25 Pouches / Minutes. (Depending upon the quantity) |
| PACKAGING RANGE | 500 gms. to 5 Kgs. |
| MOTOR | 1/2HP, 220V AC, 50Hz., Single Phase. |
| DIMENSIONS / Wt. | L : 700, W : 800, H : 2100 (mm) / 300 Kgs. |



MODEL UA-066

SEMI AUTOMATIC LIQUID FILLING MACHINE

APPLICATIONS:-

Highly Suitable for :- Liquid, Oil, Cream, Juice and like items.

TECHNICAL SPECIFICATIONS

| | |
|---------------|--------------------------------------|
| FILL CAPACITY | 2ml. To 1 ltr. (By suitable syringe) |
| MOTOR | 0.5 HP / 1 HP, 220V AC, Single Phase |
| OUTPUT | 600 to 1200 Bottle per hour. |
| WEIGHT | Approx 100 Kgs. |

MODEL UA-080 **LINEAR WEIGH FILLER MACHINE**

APPLICATIONS:-

Highly suitable for :- Pulses, Wafers, Dry Fruits, Tea Powder, Candies, Namkeen, Whole spices, Seeds and Detergent Powder etc.

TECHNICAL SPECIFICATIONS


| | |
|---------------------|---|
| NUMBER OF HEADS | Single Head /Double Head /Four Head /Multi Head |
| FEEDING METHOD | Linear Vibratory Feeder |
| WEIGHING RANGE | 5gm to 1kg, 1kg to 5kg, 5kg to 10kg |
| SPEED (FILLS / MIN) | 8-35 depending upon the material |
| WEIGHING ACCURACY | 0.1% to 2% depending upon the material |
| POWER SUPPLY | 230V. AC. Single phase 300VA per Head |





MODEL UA-092

BAG WEIGH FILLER & SEALING MACHINE

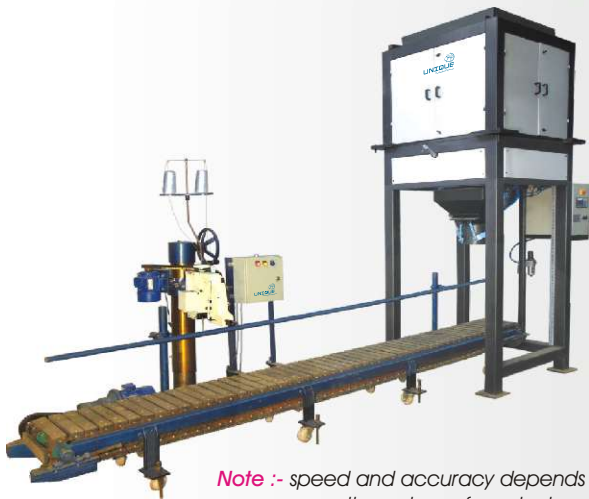

FEATURES

- Pouch/Cloth/Jute/LDPE
- Rugged, Reliable and Highly Accurate
- Feed Mechanism - Gate/Vibrator/Screw Feeder
- Two Stage Filling - Coarse & Fine
- Auto/Manual
- Bag - Clamp/Fill/Stop Options
- Attached with Conveyor and Sealing Machine

TECHNICAL SPECIFICATIONS

| CAPACITY | 1 kg | 5 kgs | 25 kgs | 50 kgs | 75 kgs | 100 kgs |
|------------|---------|---------|---------------|------------|--------|---------|
| SPEED/hour | 240-300 | 240-300 | 180-210 | 120-150 | 80-100 | 40-60 |
| ACCURACY | +2gms | +5gms | +20gms | +20gms | +50gms | +100gms |
| BAGGING | pouch | pouch | cloth/plastic | cloth/jute | jute | jute |

Note :- speed and accuracy depends upon the nature of products.

MODEL UA-011A

AGRICULTURAL DESTONER

Our organization is counted amongst the most distinguished providers of Agricultural Destoner. Products range we offer is widely demanded in the industry due to their superior quality and designing. This range of Agricultural Destoner is manufactured by the team of professionals using top class components and latest technology as per the set industry norms.



TECHNICAL SPECIFICATIONS

| | |
|-------------|-------------|
| DRIVEN TYPE | Electric |
| CAPACITY | 250 kg/hour |
| WEIGHT | 100 kg |

MODEL UA-011

INDUSTRIAL SIFTER (Round Sifter Machine)

The Sifter Machine is a sorting and separation screening machine for mining, food processing and chemical industries. The sieve machine is suitable for screening powders, particles and liquids.

FEATURES OF VIBRATING SIEVE:

1. High efficiency in screening, separating.
2. Suitable for all kinds of powders.
3. No block of screen nets, adding bouncing ball for screening fine powders.
4. With quick release ring, fast and flexible in change of screen.
5. Environment friendly, the dustproof lid prevent powder flow efficiently.
6. The outlet direction can be adjusted free.



MODEL UA-033

MULTI FUNCTIONAL PLASTIC FILM SEALING MACHINES

APPLICATIONS:-

Highly Suitable for :- industries of food, pharmacy, seed and chemical & light industries for the sealing any heat sealable pouches, bags and sachets made by film and various composite films

TECHNICAL SPECIFICATIONS

| | |
|-------------------|--|
| MODEL | UA-033 (900W.) |
| POWER SUPPLY | 500 W. 110V. / 220V. AC. |
| SEALING SPEED | 0 to12 Metre / Minute. |
| SEALING THICKNESS | 6 to12mm. |
| FILM THICKNESS | 0.02mm to 0.80mm. |
| TEMPERATURE SCOPE | 0-300C° |
| DIMENSION / Wt. | L : 880, W : 350, H : 320 (mm.) / 22kgs. |





MODEL UA-055
POWDER MASS MIXER

APPLICATIONS:-

Highly Suitable for :- Mixing wet & dry powders.

All contact parts of S. Steel and M. Steel. Gear box hobing gear with mechanical fitting arrangement.

MODEL UA-077
HOT AIR TRAY DRYER

APPLICATIONS:-

Highly Suitable for :- Drying all type of products.

With uniform circulation of hot air in the drying chamber, complete with motor. With uniform circulation of hot air in the drying chamber, complete with motor.

TECHNICAL SPECIFICATIONS

| | | | | | | |
|---------------|------|------|------|--------|-------|-------|
| CAPACITY TRAY | 6 | 12 | 24 | 48 | 96 | 192 |
| WIDTH | 54* | 54* | 54* | 78* | 134* | 134* |
| DEPTH | 21* | 21* | 37* | 40* | 40* | 76* |
| HIGHT | 23* | 42* | 42* | 74* | 74* | 74* |
| HEATER LOAD | 3kw. | 5kw. | 5kw. | 7.5kw. | 15kw. | 30kw. |
| FAN MOTORS | ¼ HP | ½ HP | ½ HP | 1 HP | 2 HP | 4 HP |

Standard Tray Size ss 32" x 16" x 1¼"



MODEL UA-088
SCREW FEEDING CONVEYOR WITH MIXER

APPLICATIONS:-

Highly Suitable for :- To convey powders from one station to another station like, from one pulveriser to another, or from pulveriser to mixing unit or to pouch packing machines etc.

TECHNICAL SPECIFICATIONS

| | |
|-----------|----------------------------------|
| MOTOR | 2 HP. (Two Motors), Three Phase. |
| MAX. LOAD | 3.5 Kw. |




MODEL UA-088A
Z-TYPE BUCKET ELEVATOR

APPLICATIONS:-

Highly Suitable for :- Vertical or Z-type bucket elevators made with high accuracy and precision are most suitable for the Snacks Packaging industry. These Vertical bucket elevator are used to carry Granular Products to machine hopper. The speed of elevator is synchronized with the main machine. The elevators are also equipped with Vibratory feeding system on ground hopper for easy feeding of the product to the buckets without breaking them.

TECHNICAL SPECIFICATIONS

| | |
|-----------|--------------------|
| MOTOR | 1 HP. Three Phase. |
| MAX. LOAD | 1 Kw. |

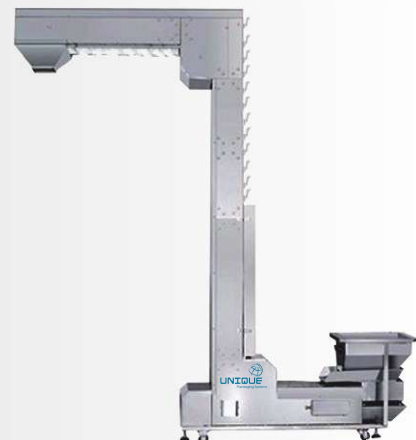

**WE DESIGN, DEVELOP PACKAGING MACHINE TO YOUR NEEDS
WE BELIVE IN HONESTY, QUALITY & COMMITMENT**

**MODEL UA-101
SEMI AUTOMATIC BOX PASTING MACHINE**

We offer supreme range of Semi Automatic Box Sealing Machine which are suitable for various types of boxes. These packaging equipment are the best Packing Systems available in the industry.



TECHNICAL SPECIFICATIONS

| | |
|-------------------|-------------------------------------|
| Country of Origin | Made in India |
| Speed | 15 - 25 BOX/Min. |
| Voltage | 220V 50HZ |
| Weight | 200KG |
| Air Pressure | 4 CFM @ 6kg/cm ² |
| Temperature | 180 - 200 DEGREE |
| POWER REQUIRED | 3.2KW |
| GLUE TANK VOLUME | 1.5KG |
| Box Size | L 80-280mm, W 40-200mm, H 20-90 mm. |
| Machine Size | L 1700mm, W 750mm, H 1450mm. |



UNIQUE
Packaging Systems

Plot No. 24B/5 Industrial Area, N.I.T. FARIDABAD -121001 (Haryana) INDIA
Mob. : +91-9810234311, 9818844311, 9999639468
Phone : 91-129-4057522 E-mail: uniquepouch@gmail.com
Website: www.automaticpackingmachine.com

NOTE: We reserve the right to change design and modify specifications without notice